

Company Presentation

Low-Carbon • Environmentally Friendly • Digitalization

Focusing on Public Transportation, Leading a Green Future

Updated by Oct 13, 2026

CATALOG

01

Company and Brand

- Company Introduction
- Development History
- Organization Chart
- Company Culture

02

Product Overview

- Industrial Panel PC
- Industrial Monitor
- Rugged Panel PC
- Outdoor Panel PC
- Digital Signage

03

Application Cases

- Public Transportation
- Industrial and Embedded

04

Production Introduction

- Production Workshop
- Quality Control
- Reliability Test
- RA Test Condition

05

Company Advantage

- Product Qualification / Patent
- Efficient Service Timeliness
- Customization Service
- Upstream Brand Partners

06

Future Strategy and Cooperation

- Future Strategy
- Cooperation Model

01



Company and Brand

Parent Company Introduction

Shenzhen Leadtek Electronics Co.,Ltd is a national high-tech enterprise founded in 2015 in Shenzhen China. Leadtek has experienced research, design, engineering and sales team to support our customers. Leadtek adheres to the vision of " Display Smart Life " , the core value of " People-Oriented, Continuous Innovation " and provide comprehensive display solutions for every customer.

We design and manufacture a wide range of display products including Customize TFT Display, Rugged Display, Transflective/Reflective Display and Smart Display from 1.3" to 31.5" for vertical markets. Our products are exported to Europe, Oceania, North America, South America and Asia.

Leadtek Optoelectronics covers an area of 30,000 square meters. The factory has industry-leading automated production and testing equipment and has passed ISO9001, ISO14001, ISO13485, IATF16949 and other certifications.



Techtion Smart, a subsidiary of Leadtek Electronics

Techtion Smart is affiliated to Shenzhen Leadtek Electronics Co., Ltd. (referred to as Leadtek), and is the complete machine division founded by Leadtek in 2024. Relying on the technology, resources and management experience accumulated by Leadtek since its establishment in 2015, Techtion Smart provides customers with tailor-made low-carbon and environmentally friendly touch display terminal solutions.

Our strategic positioning: to accelerate the digital transformation of industries in various fields with low-carbon, energy-saving and eye-protection new display technologies, and to promote digital, economic innovation and sustainable development. We design, manufacture and sell various sizes Industrial Panel PC, Industrial Monitor, Rugged Panel PC, Outdoor Panel PC and Digital Signage for vertical markets. Our products are mainly used in industrial & embedded, public transportation fields.



Development History

2015

Leadtek Electronics established

2020-2022

The platform boasts 7,800 registered members and hosts 12,000 online product specification documents, delivering tailored industry-specific integrated solutions for domestic clients.

2024-2026

Techtion Smart was rebranded from Panelhunt and found up of Shenzhen Techtion Smart Electronics Co.,Ltd. Specializing in the design, manufacture and sales of various Industrial Panel PC, Industrial Monitor, Rugged Panel PC, Outdoor Panel PC and Digital Signage.

2019

Found up of Shenzhen Panelhunt. Focusing on upstream and downstream resource integration, serving domestic clients and supply chains.

2023

R&D and manufacturing of reflective / transfective display and smart display

Organization Chart



Company Culture



Brand Culture



Vision: Display Green Smart Life

Mission: Your Reliable ECO-Friendly Display Terminal Partner

Core Value: Integrity, Sharing, Shared Responsibility, Win-Win

Philosophy

Business Philosophy:
Leading high-quality development with technology innovation



Management Philosophy:
team cohesion, focus on goals; result-oriented,
efficiency improvement, enthusiastic investment, efficient execution

R&D Philosophy: Gather wisdom, conduct in-depth research
and create bravely

02



Product Overview

Product Overview

Application	Industrial & Embedded		Public Transportation		
	Industrial Panel PC	Industrial Monitor	Rugged Panel PC	Outdoor Panel PC	Digital Signage
Size	7.0~21.5 inch	7.0~21.5 inch	28.6~ 47.6 inch	13.3~98.0 inch	13.3~98.0 inch
Feature	• Rugged and Durable • Wide temp & Voltage Range • Stable and Reliable • Rich interfaces • Performance Compatibility	• Environmental Adaptability • Ultra-Clear Viewing • Stable Connection • Flexible Installation • Long-Term Operation	• Extreme Protection • Ultra-Wide Temperature Range • High-Light Visibility • Secure Connectivity	• All-weather operation • Exceptional outdoor visibility • Vanish-proof and secure • Easy outdoor deployment	• Remote Centralized Management • Real-time Dynamic Publishing • Flexible Split-Screen Display • Intelligent and Precise Interaction • Secure and Controllable Publishing

Industrial Panel PC



► **Rugged and Durable:** High-strength aluminum alloy chassis, fanless design, IP65 front panel protection, dustproof, waterproof, and vibration resistant.

► **Wide Temperature and Voltage Range:** Supports a wide operating temperature range of $-10\sim 60^{\circ}\text{C}$ and a wide DC input voltage range of $9\sim 36\text{V}$, adaptable to harsh electrical environments.

► **Stable and Reliable:** Employs industrial-grade components, with an MTBF of tens of thousands of hours, supporting 24/7 uninterrupted operation.

► **Rich Interfaces:** Standard RS-232/485, Gigabit Ethernet, GPIO, and CAN bus for easy connection to industrial equipment.


► **Performance Compatibility:** Equipped with a high-performance, low-power processor, compatible with mainstream industrial operating systems and configuration software

Industrial Monitor



- ▶ **Environmental Adaptability:** IP65 dust and water resistant front panel, metal body resistant to strong electromagnetic interference.
- ▶ **Ultra-Clear Viewing:** 500-1500 nits high brightness, 178° wide viewing angle, supports touch operation while wearing gloves.
- ▶ **Stable Connection:** Supports industrial standard video interface, wide voltage (12-24V) DC power supply.
- ▶ **Flexible Installation:** Supports multiple installation methods including recessed, wall-mounted, and VESA mounting, covering sizes from 10-55 inches and above.
- ▶ **Long-Term Operation:** 24/7 uninterrupted operation, backlight lifespan of over 50,000 hours.

Rugged Panel PC

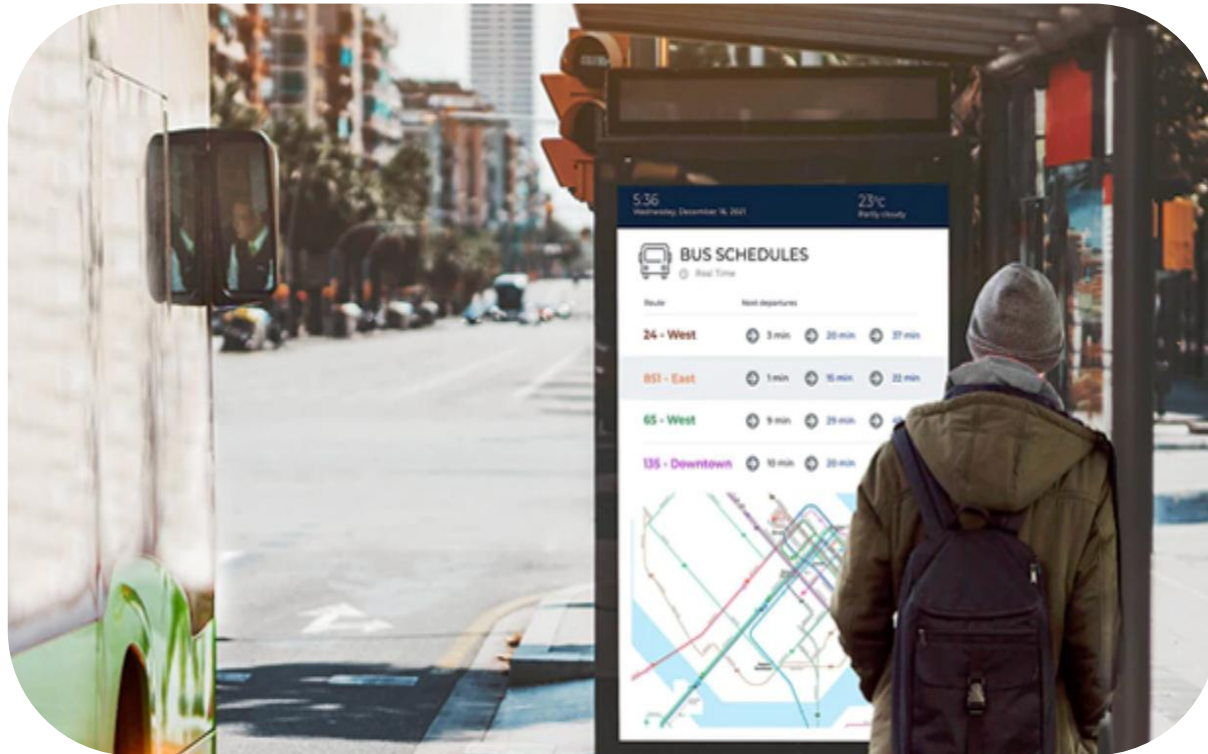

► **Extreme Protection:** IP65-IP67 dust and water resistant, impact-resistant, vibration-resistant, and salt spray corrosion resistant.

► **Ultra-Wide Temperature Range:** Supports stable operation in extreme environments from -40°C to 70°C.

► **High-Light Visibility:** ≥ 1000 nits ultra-high brightness, optical bonding technology, clearly readable even in direct sunlight.

► **Secure Connectivity:** Equipped with a TPM security chip and full disk encryption, integrated with BeiDou/GPS and 4G/5G communication, and interfaces with anti-drop design.

Outdoor Panel PC




► **All-weather operation:** IP65/IP66 protection, built-in air conditioning/heater for -30°C~50°C temperature control, with anti-condensation function.

► **Exceptional outdoor visibility:** ≥ 1500 nits ultra-high brightness, optical bonding and AR/AG anti-glare treatment, with automatic light sensor adjustment.

► **Vanish-proof and secure:** Thickened metal body, vandal-proof tempered glass, equipped with anti-pry locks.

► **Easy outdoor deployment:** Supports PoE power supply and solar power solutions, providing multi-scenario installation kits.

Digital Signage

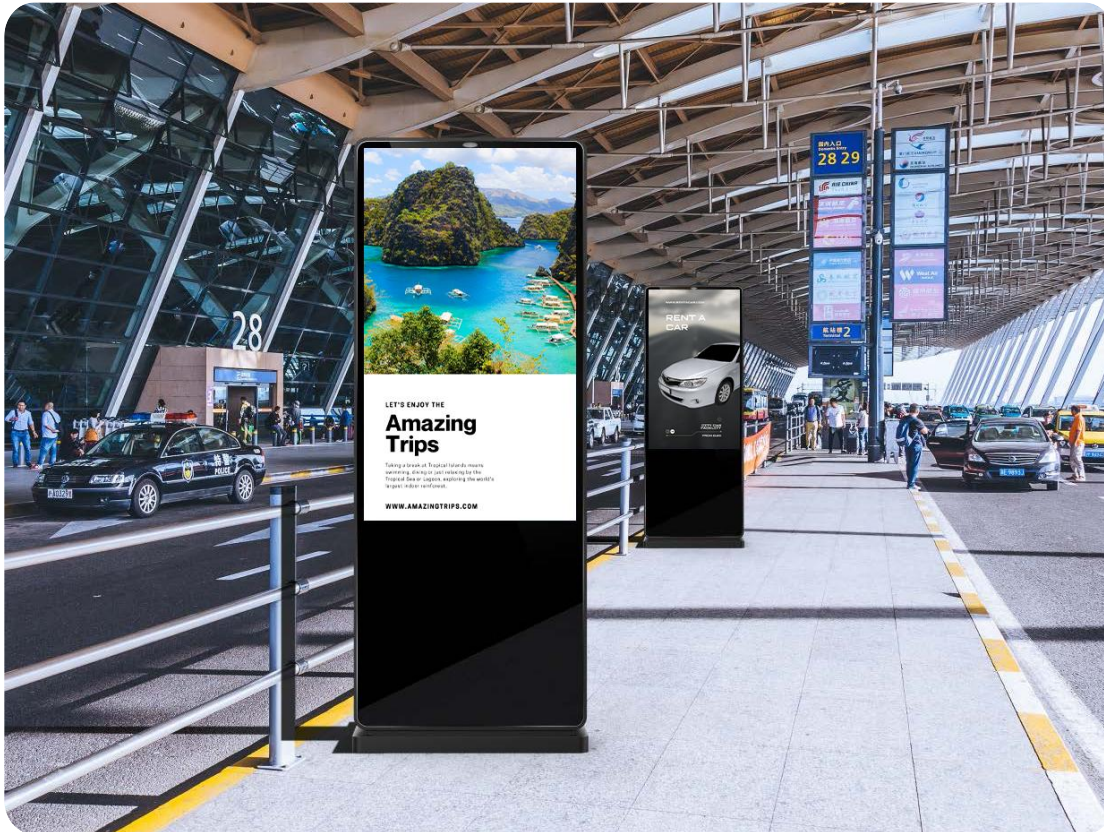

► **Remote Centralized Management:** Enables unified global terminal management via network, supporting remote content updates and device maintenance without on-site operation.



► **Real-time Dynamic Publishing:** Supports instant insertion and scheduled playback, and can simultaneously push promotional information, emergency notifications, real-time data, and other information.

► **Flexible Split-Screen Display:** Multi-area screen display simultaneously, showcasing videos, images, text, and scrolling text, improving information dissemination efficiency.

► **Intelligent and Precise Interaction:** Integrates AI sensing and facial recognition to achieve crowd analysis, precise push notifications, and interactive delivery.

► **Secure and Controllable Publishing:** Strict content review and playback control ensure compliant and secure information publishing.

Public Transportation

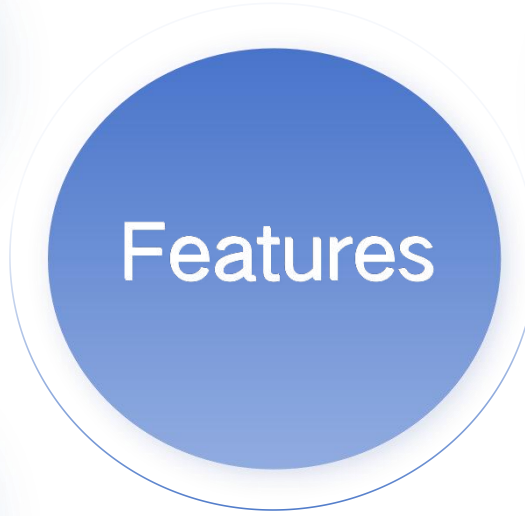

Readable in sunlight, eye protection

Reflective LCD screen, no backlight (blue light) design, reduces the damage of blue light to the eyes.



Low power consumption, energy saving

Automatic light sensing, green energy saving, front light design, supports solar power supply.



Waterproof, dustproof, lightning proof

The whole machine adopts waterproof and dustproof design, up to IP66, with built-in temperature controller, leakage switch and lightning arrester.

Wide temperature range

All raw materials are made of high and low temperature resistant materials, which can work normally in high and low temperature environments and adapt to various harsh outdoor conditions.



Strong heat dissipation performance

The whole machine has built-in multiple sets of fan groups direct ventilation and cooling system, and adopts professional and special air duct cooling design.



Stretched Bar Display

Model: TS-286THD

- Size: 28.6 inch
- Product Size: 915×185×310 mm
- Resolution: 1920*560
- Brightness: 500-1000 Nits
- Board Solution: ARM architecture
- Operating Temperature: 0-50°C
- I/O Ports: USB/Ethernet/Wifi/4G/RS485 or RS232



Shandwick Place, Stop SE		Time 12:23
Service	Destination	Due In
26	Clerwood Roseburn, Murrayfield, Corstorphine, East Craigs	12 mins
X18	Whitburn Haymarket, Roseburn, Murrayfield, Corstorphine	14 mins
31	East Craigs	20 mins

The 26 to Clerwood is due in 12 minutes.


***Available Sizes:**

28.2" /28.6" /29" /36.6" /37.6" /47.6" /57.6"

Advantages and features:

- **Paperless digital signage:** eliminates printed route maps and delayed information delivery.
- **Dynamic metro line maps:** clearly displays current position and next station in real time.
- **Arrival & door opening tips:** on-screen visuals synchronized with voice announcements.
- **Enhanced passenger experience:** making smart transportation truly smarter.

Digital Signage Display

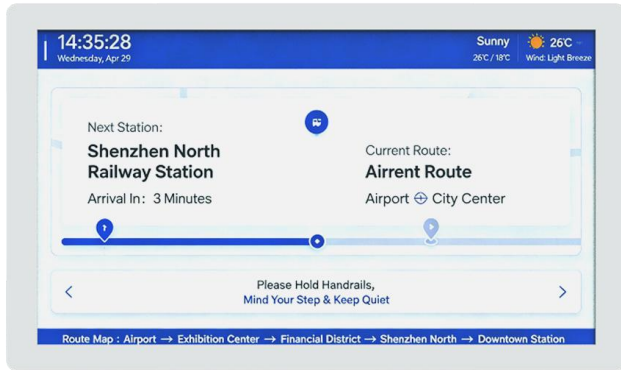

***Available Sizes:**

21.5" /32.0"

Model: TS-215THD

- Size: 21.5 inch
- Product Size: 476.064 (H) x 267.786 (V) mm
- Resolution: 1920*1080
- Brightness: <400 Nits
- Board Solution: ARM architecture
- Operating Temperature: 0-50°C
- I/O Ports: USB/Ethernet/LAN/Wifi/4G/RS485/HDMI-IN/DC

Advantages and features:

- **Display:** FHD IPS, 178° Viewing Angle, E-LED Backlight.
- **Durability:** All-Metal, Anti-Interference, Shock/Vibration Resistant.
- **Reliability:** Industrial-Grade, 24/7 Continuous Operation.
- **Smart Features:** RTC, Scheduled Power On/Off, Network Wake-Up.
- **Applications:** Smart Transit – Bus, Metro, and More.

Outdoor Digital Signage

Model: TS-430THD

- Size: 43 inch
- Resolution: 1920*1080
- Brightness: 2500-5000 Nits
- Contrast Ratio: 100000:1
- Color Gamut (NTSC Ratio): 85 – 105%

Advantages and features:

- **High Contrast, Clear, and Energy-efficient Display:** Utilizes local dimming backlight technology to independently control bright and dark areas, achieving deeper blacks, higher contrast, and reduced power consumption, ensuring clear visibility even under strong sunlight.
- **Durable and Outdoor-ready:** Sturdy, corrosion-resistant, and weatherproof design, capable of withstanding rain, high temperatures, dust, and other harsh outdoor conditions for long-term stable operation.
- **Supports Information and Advertising:** Can display real-time bus information, traffic guidance, or advertisements, enhancing urban information services and commercial value.



*Available sizes:

15.6" / 21.5" / 32" / 43" / 55" / 65" / 75"

Outdoor PID (Passenger Information Display)

Model: TS-366THDL

- Size: 36.6 inch
- Resolution: 1920*290
- Local Dimming Zones: 366
- Peak Brightness: 2500 nits



Advantages and features:

- **Local Dimming & Energy-efficient:** Advanced 366-zone local dimming technology dynamically adjusts backlight brightness across different areas of the screen, delivering higher contrast, deeper blacks, and improved readability while reducing power consumption by an average of 30 – 40%.
- **Flexible Mounting & Transit-ready:** Supports both ceiling-hanging and wall-mounted installation, providing a flexible and space-efficient solution for bus stops, transit stations, and other smart transportation environments.
- **Wide-format Transit Applications:** Designed for bus stops, transit stations, platforms, and other smart transportation environments, providing an ideal wide-format solution for passenger information and public announcements.

Outdoor PID (Passenger Information Display)

Model: TS-133PHDC



Braille Button Design

*Available sizes:

13.3" / 29.0" / 31.5"

- Size: 13.3 inch
- Resolution: 1650*2200
- Display Mode: Reflective Display(Cholesteric LCD)
- Light Source: Front Light + Ambient Light

Advantages and features:

- **Energy-efficient & Sunlight-readable:** Utilizes reflective cholesteric LCD technology for ultra-low power consumption and excellent visibility under direct sunlight, and can be integrated with solar panels for sustainable outdoor operation.
- **Accessible & User-friendly Operation:** Features tactile/Braille buttons for front lighting activation and information page switching, providing convenient and accessible operation for passengers.
- **Outdoor-ready & Smart Transportation:** Designed with a weather-resistant and corrosion-resistant structure for bus stops, transit stations, and other outdoor smart transportation applications.

Outdoor PID (Passenger Information Display)

Model: TS-312EPD



*Available sizes:

13.3" /28" /31.2" /42"

- Size: 31.2 inch
- Resolution: 2560*1440
- Display Colour: E ink Monochrome
- Light Source: Front Light + Ambient Light

Advantages and features:

- **Low Power Consumption and Sunlight-readable:** Uses ambient light reflection to display content without backlight, ensuring energy efficiency and clear visibility even under direct sunlight.
- **Automatic Front Light for Night Use:** Built-in front light system automatically activates in low-light or nighttime conditions to ensure readability.
- **Durable and Outdoor-ready, Supports Information Display:** Sturdy and corrosion-resistant structure suitable for various outdoor environments, capable of displaying bus arrival times, route information, or advertisements.

Industrial & Embedded

Strong, shock-resistant, anti-interference, and corrosion-resistant


Industrial grade protection, made of die-cast aluminum or stainless steel, fully enclosed structure, front panel IK03-IK10

High temperature resistance

Able to work normally in high and low temperature environments, adapting to various harsh conditions in industrial production processes

Waterproof and dustproof

Conventional machine front panel IP65 waterproof and dustproof
Stainless steel machine IP67-69K waterproof and dustproof

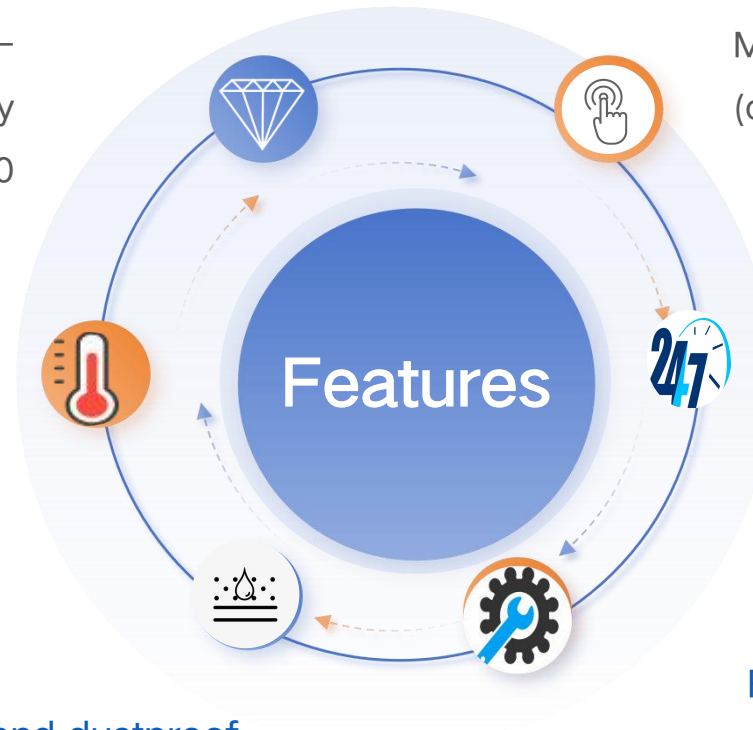

Human-computer interaction

Multi-point capacitive / resistive touch
(can be waterproof touch)

Long service life

Industrial-grade panel, 7*24 hours operation, service life up to 50,000 hours.

Flexible installation

Open structure/embedded/wall-mounted/desktop/hanging wall



Embedded (Panel Mounted)



Open Frame

- Regular size: 7/8/10.1/10.4/12.1/13.3/15.6/18.5/21.5 inches
- Touch: capacitive touch/resistive touch/non-touch
- Brightness: 300-1000nits
- Regular motherboard solution:
 1. Monitor
 2. ARM architecture (RK3568/RK3288/RK3399/RK3588)
 3. X86 architecture (J1900/J4125/J6412, Intel I3/I5/I7)
- System (foreign): Android/Windows/Linux (Debian, Ubuntu)
- Bonding method: air bonding/oca bonding
- Product features: fully enclosed fanless, 2.5mm low-step sink (perfect embedding fit), strong and shock-resistant, strong heat dissipation, anti-interference, wide temperature range, pure flat IP65, 7*24H, flexible installation.
- Customizable: size/appearance/touch/cover (such as: AG)/brightness/function/interface/IK level
- Product application: industrial automation equipment/AGV smart car/intelligent production line/intelligent robot



VESA Mount

- Regular size: 15.6/18.5/21.5/23.8/27/32/43/55 inches
- Touch: capacitive touch/resistive touch/non-touch
- Regular motherboard solution:
 1. Monitor
 2. ARM architecture (RK3568/RK3288/RK3399/RK3588)
 3. X86 architecture (J1900/J4125/J6412, Intel I3/I5/I7)
- System (foreign): Android/Windows/Linux (Debian, Ubuntu)
- Brightness: 300-1000nits
- Bonding method: air bonding/oca bonding
- Product features: fully enclosed one-piece die-cast back shell, strong and shock-resistant, strong heat dissipation, anti-interference, wide temperature, flat IP65, 7*24H, flexible installation
- Customizable: size/appearance/touch/cover (such as AG)/brightness/function/interface/IK level
- Product application: industrial automation equipment/intelligent production line



Stainless Steel Series

- Regular size: 8/10.1/12.1/13.3/15/15.6/17.3/19/21.5/23.8/32 inches
- Touch: capacitive touch/resistive touch/non-touch
- Regular motherboard solution:
 1. Monitor
 2. ARM architecture (RK3568/RK3288/RK3399/RK3588)
 3. X86 architecture (J1900/J4125/J6412, Intel I3/I5/I7)
- System (foreign): Android/Windows/Linux (Debian, Ubuntu)
- Brightness: 300-1000nits
- Bonding method: air bonding/oca bonding
- Product features: SUS304 stainless steel material, IP67 dustproof and waterproof, aviation socket, corrosion resistance, high temperature resistance, anti-interference
- Customizable: size/appearance/touch/cover (such as AG)/brightness/function/interface/IK level
- Product application: special environments, such as: food processing plants, marine operations, water treatment plants, pharmaceutical plants, meat slaughterhouses, ports, oil fields, chemical plants, etc.

03



Application Cases

Public Transportation Cases

Subway Cases




Shenzhen Metro - 37.6 inch



Changchun Metro - 37.6 inch



Pakistan Metro - 28.6 inch

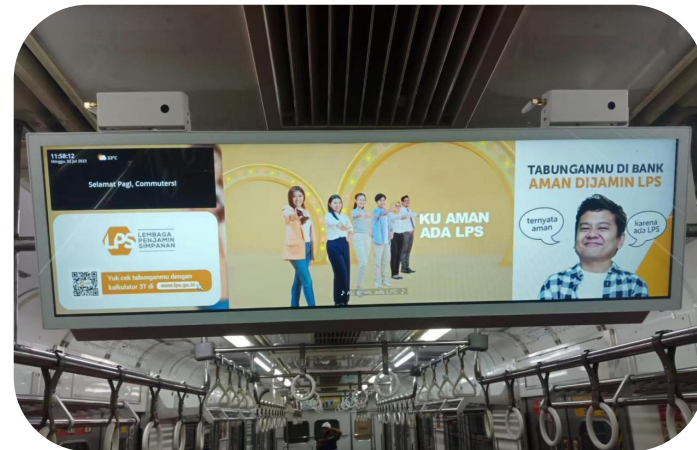

Indonesia Metro - 38.0 inch

Bus Cases



Jiangxi Nanchang Bus - 28.2 inch




Hunan Zhangjiajie Bus - 28.6 inch



Hangzhou Bus - 36.6 inch



Zhejiang Ningbo Bus - 36.6 inch

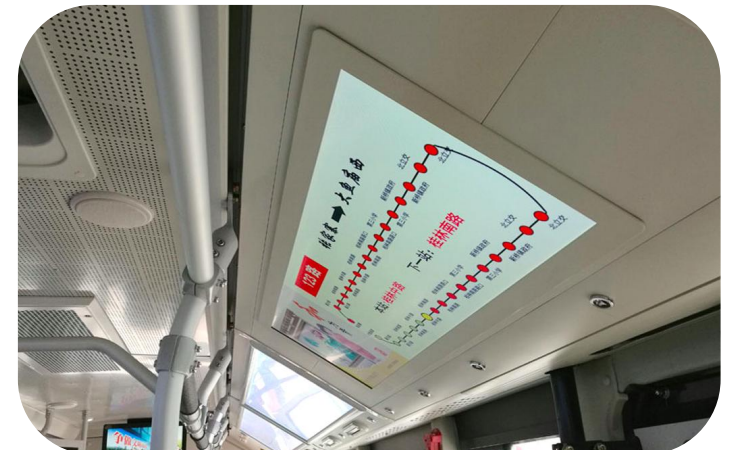

Jiangsu Lianyungang Bus - 42.0 inch

Smart Bus Stop Electronic Signs



13.3" 1200x1600
Eco-Friendly Display



55.0" 1080x1920
TFT LCD



32.0" 1080x1920
TFT LCD



31.2" 1440x2560
E-Paper Display

Outdoor Display Cases



Project Name: Suzhou Industrial Park
Electronic Bus Stop Sign

Size: 32 inches

Quantity: 180 units



Project Name: Fuzhou Electronic Bus Stop
Sign(E-Paper)

Size: 31.2 inches

Quantity: 56 units



Project Name: Hainan Electronic Bus Stop
Sign

Size: 55 inches

Quantity: 25 units

Industrial Applications

Smart Manufacturing Applications



CNC Machine tool
equipment



Industrial visual
inspection equipment



Factory Intelligent
Application Production Line



Ships, Maritime



Laboratory



Industrial automation
robot arm matching



Military and heavy
industry equipment



Industrial electrical
equipment



Pharmaceutical Factory




Food Processing Plants

04



Production Introduction

Production Workshop

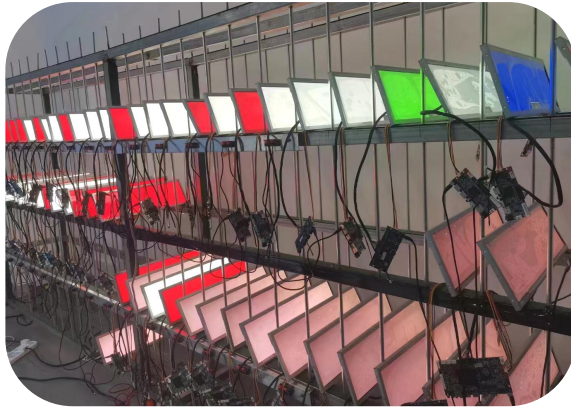

Aging Room



Laboratory



Glass Cutting Workshop




Production Workshop




Dust-free Workshop

Quality Control

Production Process

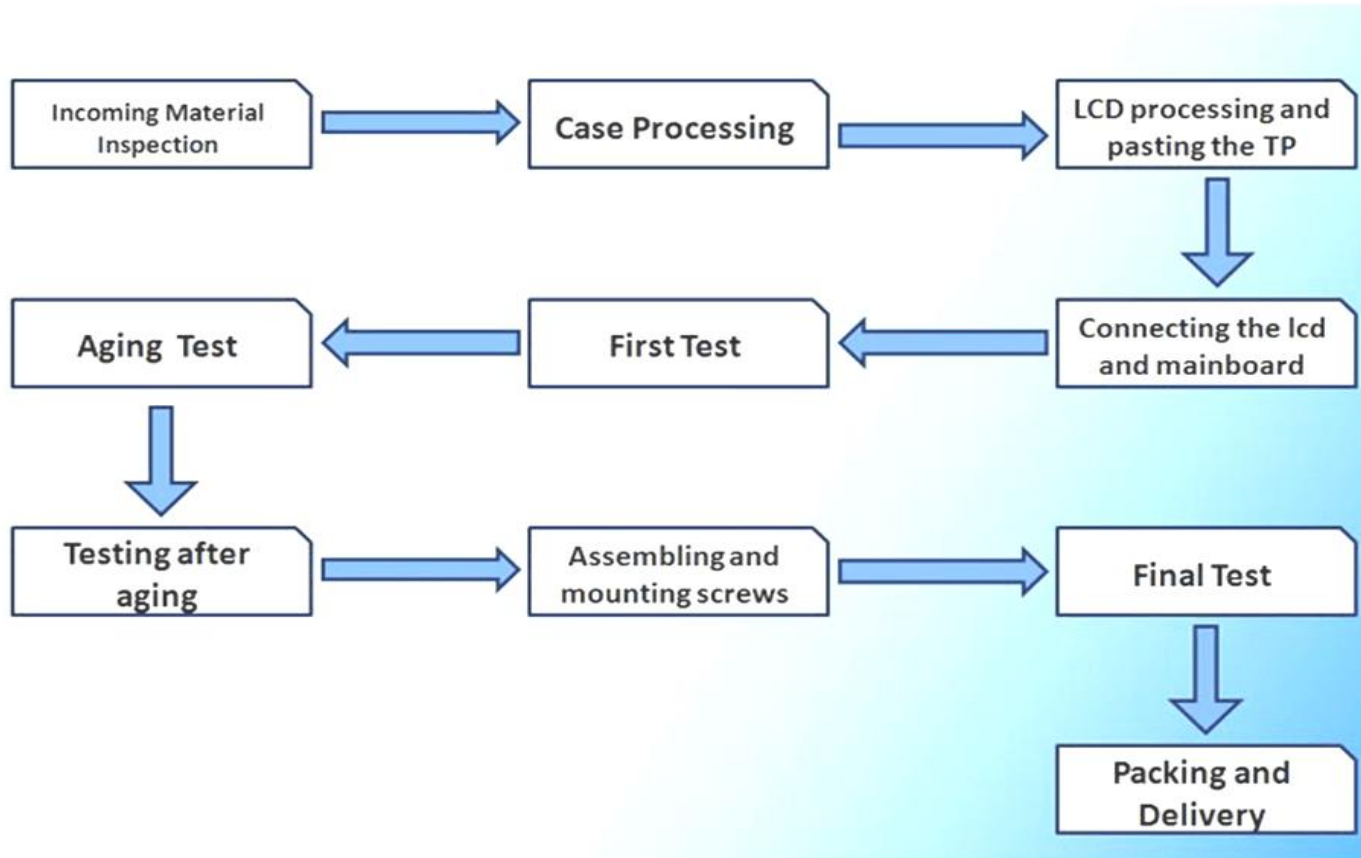

Quality Control Process

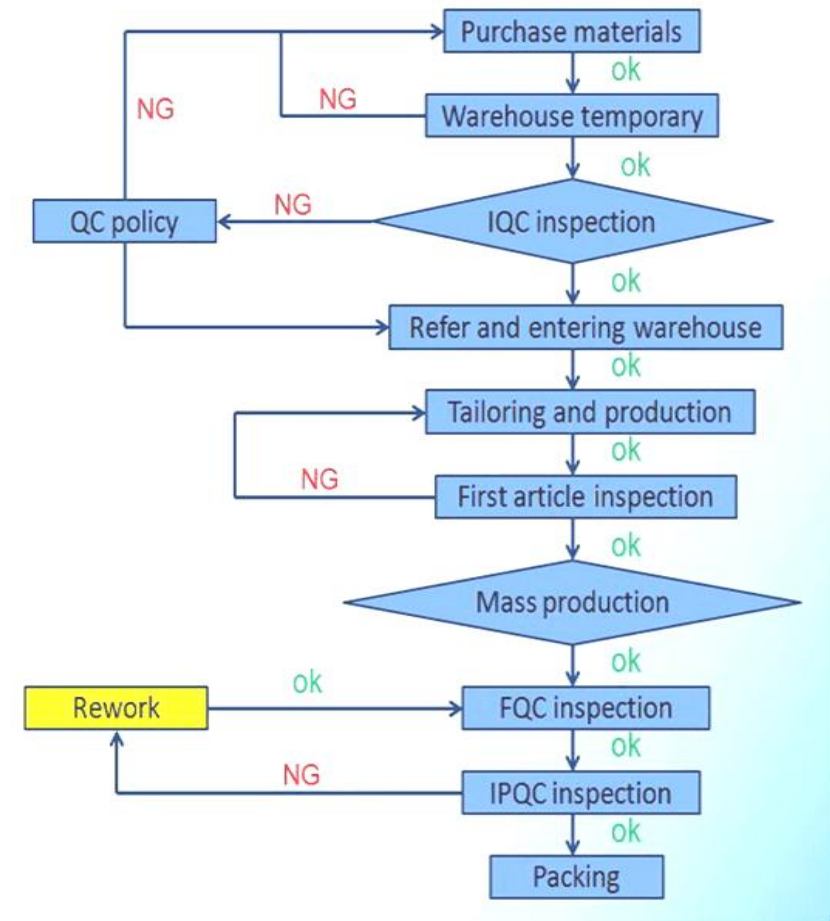

Reliability Test



DC voltage regulator/
electronic load



Withstand Voltage Test



Static Electricity Test



48 Hours Aging Test



Salt Spray Test



Programmable Rain Test




Programmable High and Low
Temperature Resistance Test



Programmable Temperature
and Humidity Test



IK Rating Test



UV Test



Simulated Car
Vibration Test



Drop Test

Test Condition (Core RA Test Items for On-board PID)

No.	Test Item	Test Standard	Test Equipment	Test Condition / Duration
1	Visual Inspection	EN 50155:2021	Visual inspection	Appearance inspection
2	Performance Test	EN 50155:2021	Functional test equipment	Power-on functional verification
3	Insulation Test	EN 50155:2021	YD9820A insulation tester; 125B withstand tester	DC500V insulation; AC1500V withstand; 1 minute
4	Low Temperature Start-up Test	EN 50155:2021	ZJ-HWHS1000B Temperature & Humidity Chamber	-25°C; 2.5 hours
5	Dry Heat Test	EN 50155:2021	ZJ-HWHS1000B Temperature & Humidity Chamber	70°C operation; 85°C performance test
6	Cyclic Damp Heat Test	EN 50155:2021	ZJ-HWHS1000B; YD9820A; 125B	55°C/25°C cycles; 2 cycles; 2×24 hours
7	Functional Random Vibration Test	EN 50155:2021	DC-2200-26 vibration tester	Category 1 Class B; 5Hz-150Hz; 30 min/direction
8	Simulated Long Life Test	EN 50155:2021	DC-2200-26 vibration tester	Category 1 Class B; 5Hz-150Hz; 5 hours/direction
9	Shock Test	EN 50155:2021	DC-2200-26 vibration tester	Category 1 Class B; 30ms pulse; 3 times/direction
10	DC Power Supply Test	EN 50155:2021	NF KP3000GS programmable AC/DC power supply	Voltage variation and interruption test
11	Power Line Conducted Emission	EN 50121-3-2:2016+A1:2019	EMI receiver and LISN	Conducted emission test
12	Radiated Emission	EN 50121-3-2:2016+A1:2019	EMI receiver and antenna	Radiated emission test
13	ESD Test	EN 50121-3-2 / IEC 61000-4-2	ESD simulator	Electrostatic discharge immunity
14	RF Field Immunity	EN 50121-3-2 / IEC 61000-4-3	Signal generator, amplifier, antenna	Radiated RF immunity
15	EFT/Burst Test	EN 50121-3-2 / IEC 61000-4-4	EFT/Burst generator	Fast transient immunity
16	Surge Test	EN 50121-3-2 / IEC 61000-4-5	Surge generator	Surge immunity
17	Injected Current Susceptibility	EN 50121-3-2 / IEC 61000-4-6	Signal generator, CDN, EM clamp	Conducted RF immunity

Test Condition (Industrial Monitor&Industiral Panel PC)



No.	Test Category	Test Item	Test Standard	Test Equipment	Test Condition / Duration
1	Safety (LVD)	General Safety Evaluation	IEC 62368-1:2018	Safety Test System	Product safety evaluation according to IEC 62368-1 requirements
2	Safety (LVD)	Electrical Safety	IEC 62368-1:2018	Electrical safety analyzer	Verification of electrical safety requirements
3	Safety (LVD)	Energy Source / Component Evaluation	IEC 62368-1:2018	Safety evaluation tools	Evaluation of internal components and power supply
4	Safety (LVD)	Enclosure / Mechanical Safety	IEC 62368-1:2018	Mechanical inspection tools	Enclosure construction verification
5	EMC Emission	Conducted Emission	EN 55032:2015+A11:2020+A1:2020	EMI Receiver + LISN	AC power port conducted emission test
6	EMC Emission	Radiated Emission	EN 55032:2015+A11:2020+A1:2020	EMI Receiver + Antenna	Radiated emission measurement
7	EMC Emission	Harmonic Current Emission	EN IEC 61000-3-2:2019+A1:2021	Harmonic Current Analyzer	Harmonic current evaluation
8	EMC Emission	Voltage Fluctuation & Flicker	EN 61000-3-3:2013+A2:2021	Flicker Analyzer	Voltage variation and flicker test
9	EMC Immunity	Electrostatic Discharge (ESD)	EN 55035 / EN 61000-4-2	ESD Simulator	Contact / Air discharge immunity test
10	EMC Immunity	Radiated RF Immunity (RS)	EN 55035 / EN IEC 61000-4-3	Signal Generator + Amplifier + Antenna	Radiated RF field immunity test
11	EMC Immunity	Electrical Fast Transient / Burst	EN 55035 / EN 61000-4-4	EFT/Burst Generator	Fast transient immunity test
12	EMC Immunity	Surge Immunity	EN 55035 / EN 61000-4-5	Surge Generator	Surge immunity test
13	EMC Immunity	Conducted RF Immunity (CS)	EN 55035 / EN 61000-4-6	Signal Generator + CDN	0.15MHz~80MHz conducted RF immunity
14	EMC Immunity	Power Frequency Magnetic Field	EN 55035 / EN 61000-4-8	Magnetic Field Generator	Power frequency magnetic immunity
15	EMC Immunity	Voltage Dips & Interruptions	EN 55035 / EN IEC 61000-4-11	Voltage Dip Simulator	Voltage dip and interruption immunity
16	FCC Emission	Conducted Emission	FCC 47 CFR Part 15 Subpart B	EMI Receiver + LISN	AC conducted emission
17	FCC Emission	Radiated Emission Below 1GHz	FCC 47 CFR Part 15 Subpart B	EMI Receiver + Antenna	30MHz~1GHz, 3m distance measurement
18	FCC Emission	Radiated Emission Above 1GHz	FCC 47 CFR Part 15 Subpart B	EMI Receiver + Antenna	1GHz~40GHz measurement range
19	Environmental	Dry Heat Test	GB/T 2423.2-2008	Temperature Chamber	50℃, 2h, sample storage condition
20	IP Protection	Dust Protection IP6X	IEC600529:2013	Dust Chamber	Talc powder 75μm, 8h continuous dust blowing, 2kg/m³
21	IP Protection	Water Protection IPX5	IEC600529:2013	Water Spray Equipment	Nozzle 6.3mm, distance 2.5~3m, flow 12.5L/min, 5min
22	Material Compliance	RoHS Chemical Test	EU RoHS Directive (EU) 2015/863	XRF Analyzer + Chemical Analysis	Pb, Hg, Cd, Cr(VI), PBB, PBDE, DEHP, BBP, DBP, DIBP

05




Company Advantage

Product Qualification / Patent

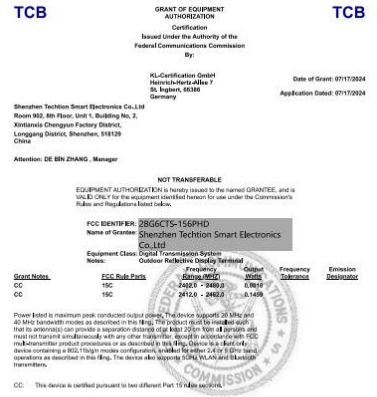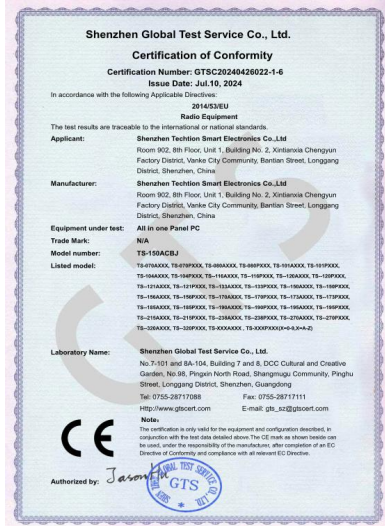

Efficient Service Timeliness

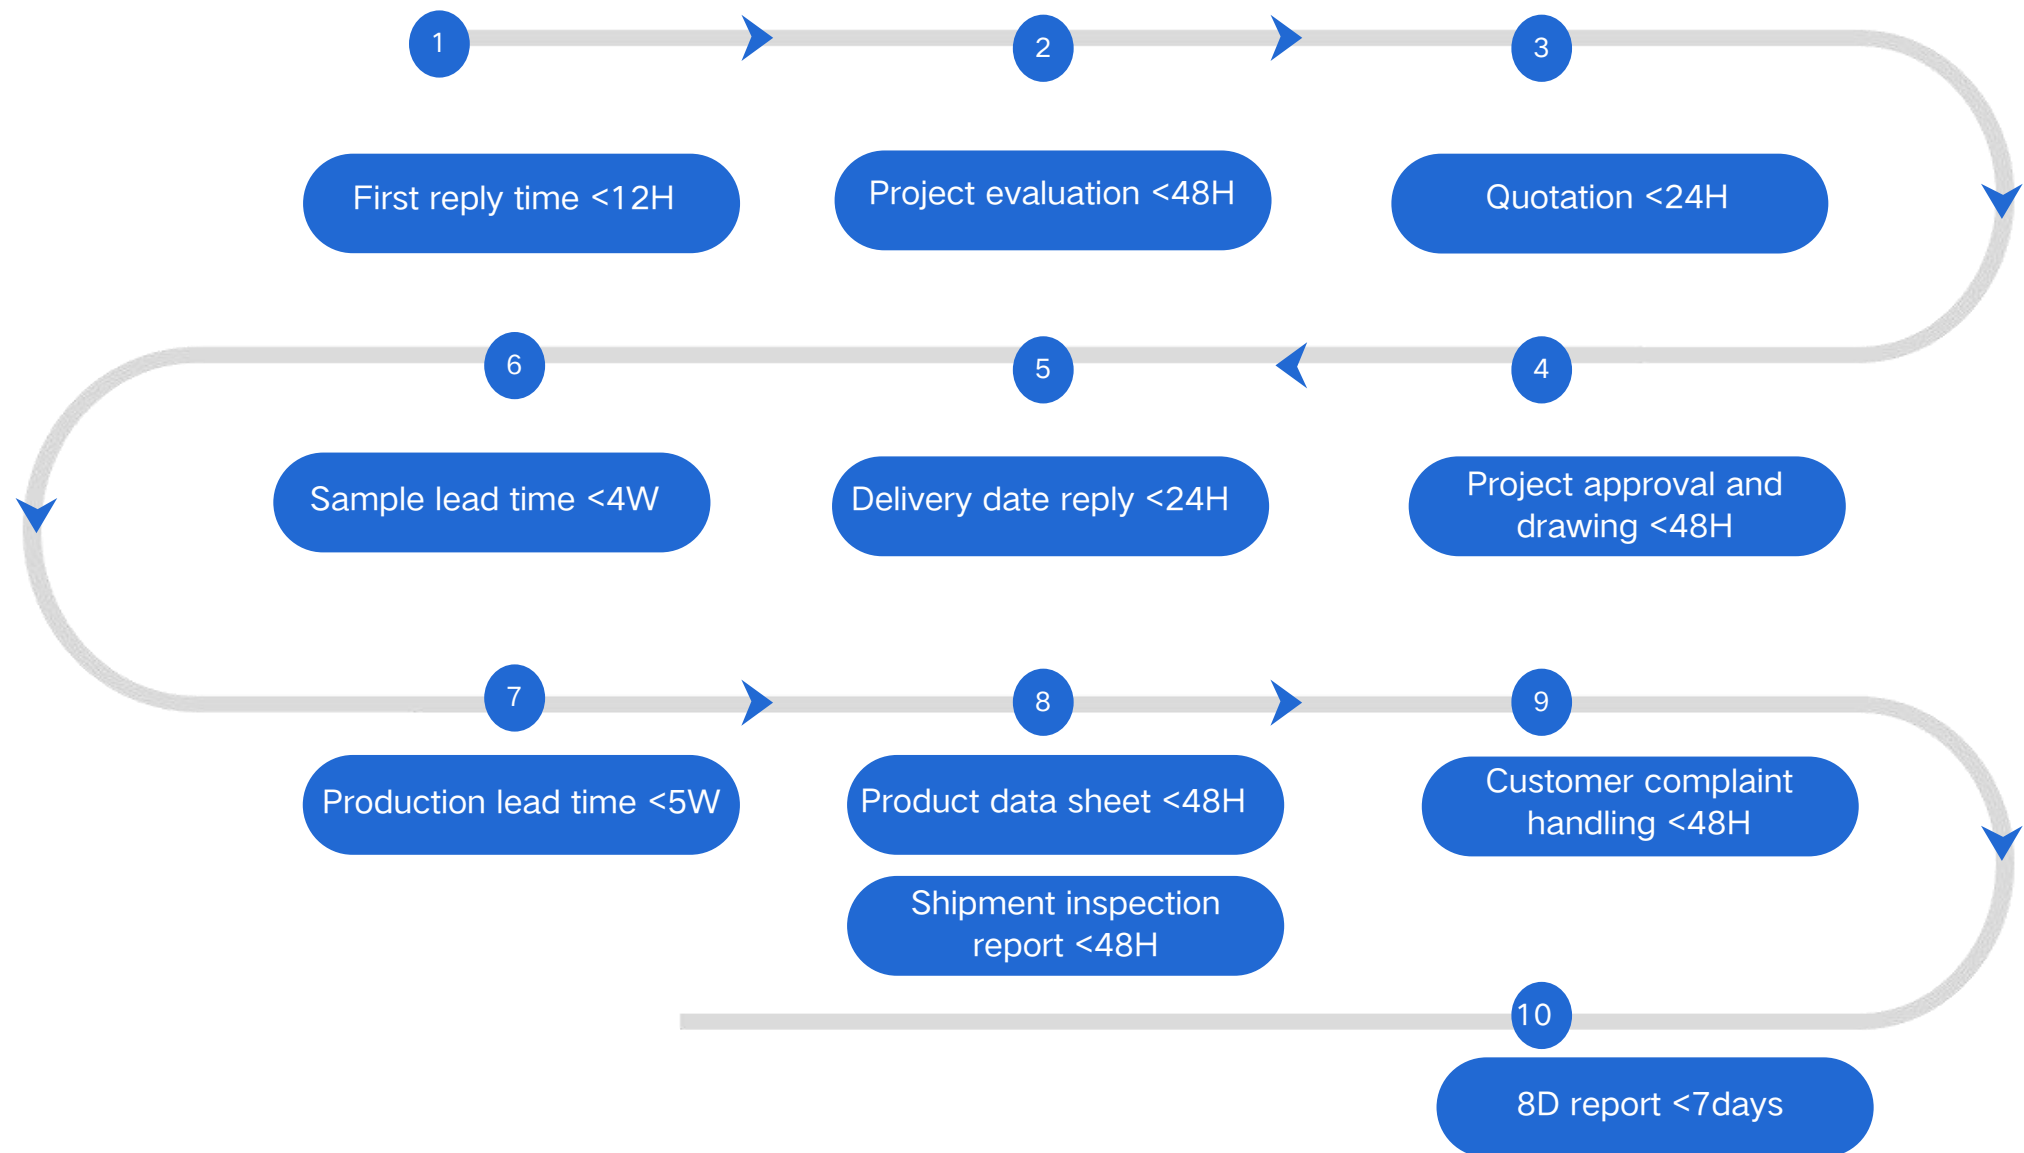

Customization Service



Wide Temperature
-20°C-70°C



High Brightness
1000-1500cd/m2



Touch Screen
Resistive/Capacitive/IR



Light Sensor
Auto dimming



Anti Glare



Vandal Proof
IPS, FHD Optional



Dimension
Customizable



Optical Bonding
Optional



System/Software
Customizable



Appearance
Aesthetic design



LOGO
logo sticker/silk printing



Mounting
Customizable



Anti-EMI
EMI test



Waterproof
IP65/IP67 optional



Shock-Proof
For special environment



Anti-corrosion
Special environment



Relay
conversion circuit



I/O Ports
Add I/O ports at requests



Wide Voltage
Anti voltage instability



Configuration
CPU/RAM/HDD/SSD

Customization Service



GPS
Global positioning



3G/4G Module
Wireless internet



Card Reader
Magnetic strips/IC



Infrared Sensor
Human IR induction



RFID Card Reader
Read IC/ID card



Built-in Camera
Auto focusing 200/500W



Thermal Printer
50/80mm receipts



ID Card Reader
Read ID information



WIFI Module
802.11b/a/g/n/ac optional



Fingerprint Reader
Attendance system



NFC Card Reader
Payment/access control



Bluetooth
Wireless data exchanging



Gravity Sensor
Screen H/V rotation



Built-in Battery
UPS



Built-in Microphone
Man-machine dialogue



Palmprint recognition
Biometric technology




Iris recognition
Andsecure identification



Scan module
Automatic recognition

Upstream Brand Partners

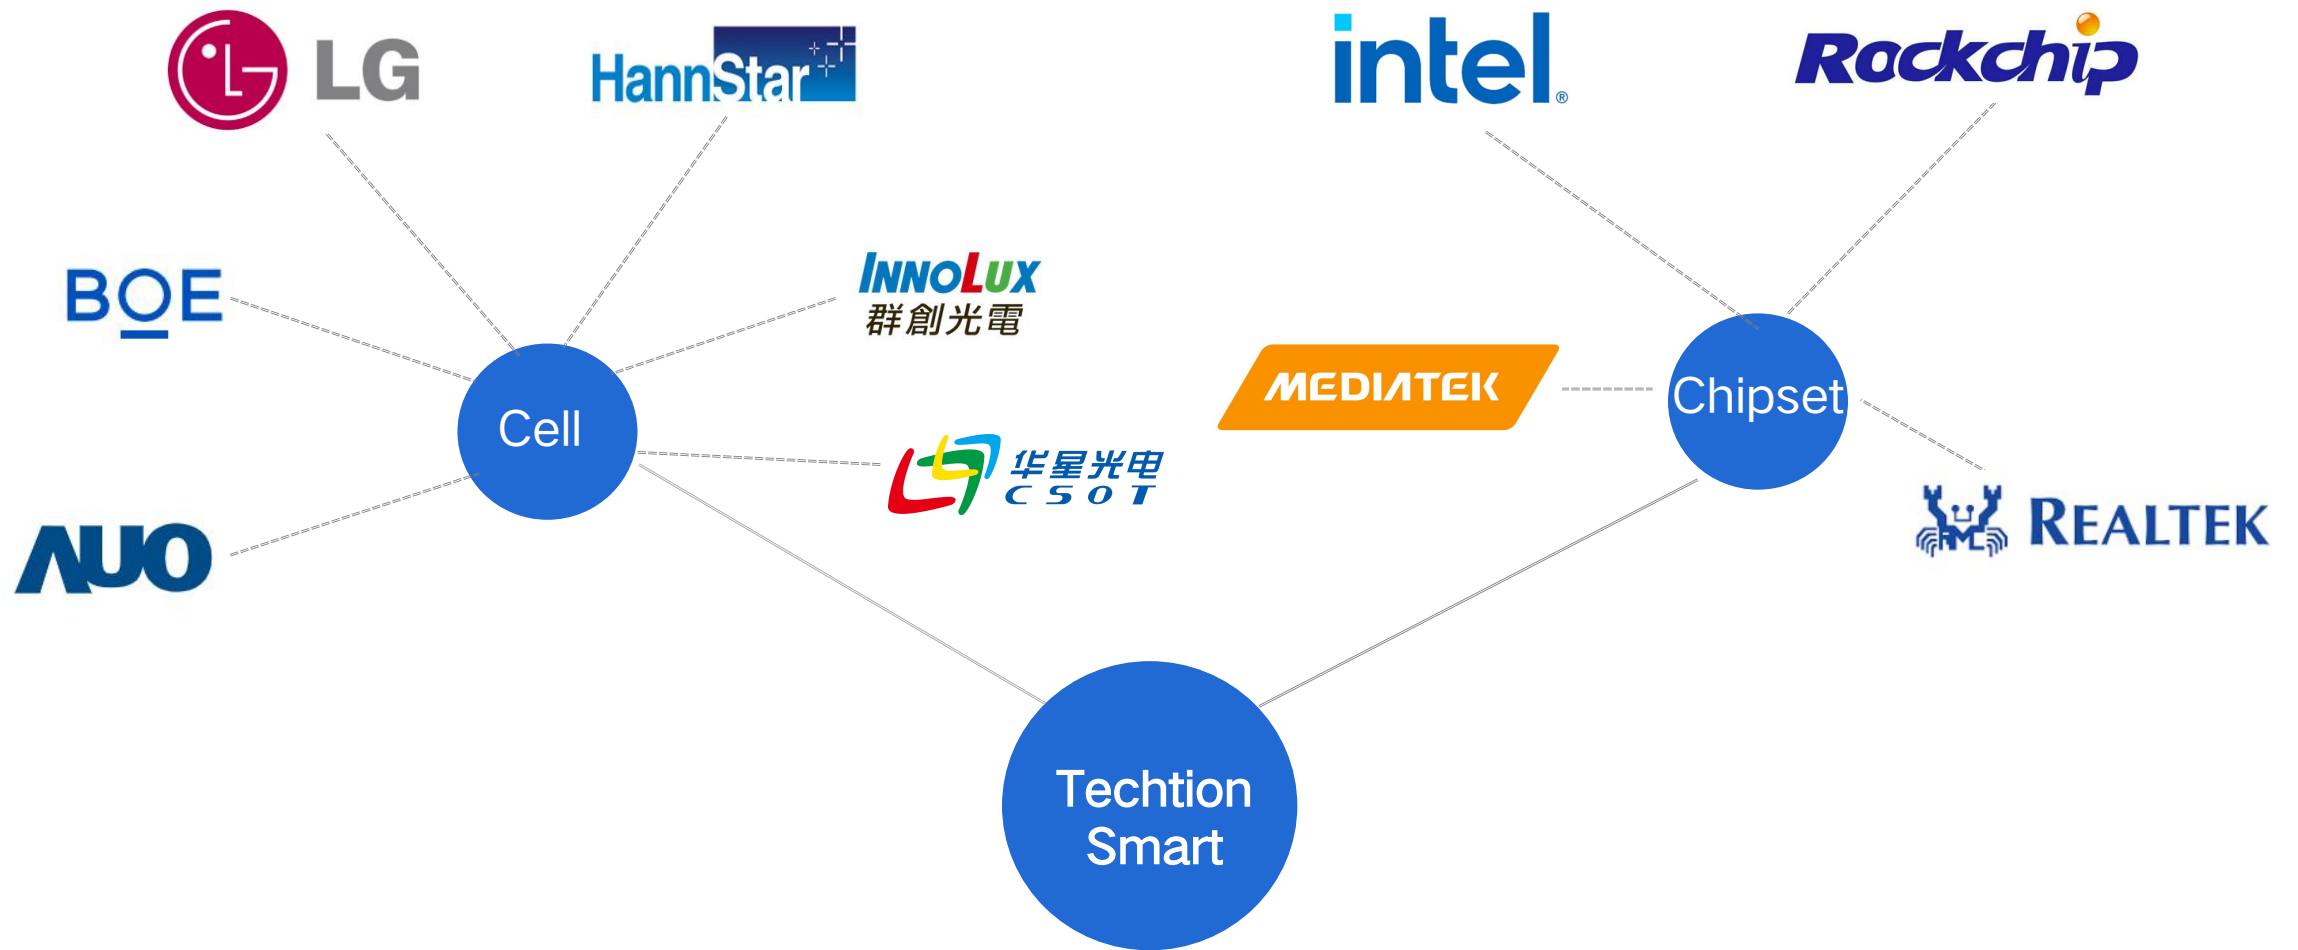

STABLE SUPPLY CHAIN TO ENSURE RELIABLE DELIVERY

06



Strategy and Cooperation

Future Strategy



01

With public transportation at its core

02

Expanding to the city's digital ecosystem

03

Gradually covering other scenarios in smart industry and smart cities

04

Integrate AI to create intelligent applications with smart dispatching, real-time data sync, and ambient light adaptive display.



Cooperation Model

ODM

Customized Environmentally Friendly
Display Terminals for Clients

OEM

Mass Production and
Global Supply

Collaborative Solution Development

Jointly Developing Smart
Transportation Projects

Contact Us

Shenzhen Techtation Smart Electronics Co.,Ltd

Contact: Sales Team

Tel: +86 755 84827079

Mail: sales@techtionsmart.com

Website: www.techtionsmart.com



Address: Room 902, 8th Floor, Unit 1, Building No. 2, Xintianxia Chengyun Factory District, Vanke City Community, Bantian Street, Longgang District, Shenzhen, China

THANKS FOR WATCHING



| Your Reliable Eco-Friendly Display Terminal Partner

Low-Carbon Displays • Driving the Future of Transportation

Green Technology • Smart Mobility